



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00830343.0

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 04/05/01
LA HAYE, LE

THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 00830343.0

Anmeldetag:
Date of filing:
Date de dépôt: 12/05/00

Anmelder:
Applicant(s):
Demandeur(s):
STMicroelectronics S.r.l.
20041 Agrate Brianza (Milano)
ITALY

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Equaliser

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
H04B3/14, H03H11/04

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

- 1 -

"Equaliser".

* * * * *

DESCRIPTION

5 The present invention refers to a method to equalise signals transmitted on a line as well as an equaliser filter realised in CMOS technology and besides an integrated circuit comprising an equaliser circuit.

10 In high speed line communications, for instance in the case of data transmission of SDH equipments, the only filtration of the received signal is not sufficient to recover the data with a small error rate. An equaliser circuit is therefore necessary to compensate the line loss and improve the intersymbol interferences of the datum to recover. As known the line dispersion losses are linearly proportional to the length of the line and besides they are proportional to the square root of the frequency of transmission. The equaliser must therefore have a frequency response
15 inversely proportional to that of the line. Particularly it is necessary an adaptive equaliser able to deal with variable lengths of line without altering signifyingly the intersymbol interferences.

Object of the present invention is that to realise an equaliser able to compensate the line attenuations in a simple and effective way.

20 In accordance with the present invention, such an object is reached by means of a method to equalise signals transmitted on a line comprising the following phases: applying an analogical adaptive filter in series to said line, having a working frequency band and having at least one pole and at least one zero the position of which in said working frequency band is variable in response to the attenuation of said line; applying a retroaction circuit to the
25 output of said filter able to vary the position of said at least one pole and at least one zero; characterised by setting said at least one pole and at least one zero in correspondence to a prefixed frequency of said working frequency band; moving the position of said at least one pole toward the high
30 frequencies at the increasing of said attenuation of said line; moving the

- 2 -

position of said at least one zero toward the low frequencies at the increasing of said attenuation of said line.

Such object is also reached by means of an equaliser circuit of signals transmitted on a line having an attenuation comprising: an analogical
5 adaptive filter applied in series to said line comprising at least two transconductance filters having a bias current each and to which it is associated at least one pole and at least one zero the position in frequency of which in the working band is variable in response to said bias current; a retroaction circuit applied to the output of said filter able to vary said bias
10 current; said bias current varies at the varying of said attenuation of said line; characterised in that said at least two transconductance filters have said bias current of prefixed value; said bias current is made to vary at the increasing of said attenuation so that said at least one pole is moved toward the high frequencies; said bias current is made to vary at the increasing of
15 said attenuation so that said at least a zero is moved toward the low frequencies.

Such an object is further on reached by means of an integrated circuit of CMOS type comprising an equaliser filter of signals transmitted on a line in accordance to what said above.

20 Thanks to the present invention it is possible to realise a linear equaliser that does not require of any external regulation. It results to be very simple as the retroaction loop checks only the output voltage. Besides realising it completely in CMOS technology it is possible to integrate it with other circuits on a single chip.

25 The characteristics and the advantages of the present invention will result evident from the following detailed description of one of its embodiment, illustrated as example not limitative in the joined sketches, in which:

the figure 1 shows a blocks scheme of the equaliser in accordance to the
30 present invention;

- 3 -

the figure 2a shows a schematic circuit of an example of a transconductance filter and the figure 2b its Bode diagram;

the figure 3 shows a schematic circuit of an example of a circuit 4 that provides an indication of the variation of the line attenuation;

5 the figure 4 shows a schematic circuit of an example of the circuit of charge pump 5;

the figure 5 shows a schematic circuit of an example of a variable bias generator 7;

10 the figure 6 shows a diagram that shows the course of the voltage to the terminal of the capacitor 6 and the course of the control current of the adaptive filter 1;

the figure 7 shows a diagram that shows the positioning and the variations of the poles/zeros in the frequencies plane;

15 the figure 8 shows a diagram that shows the course of the transfer function of the filter 1 in the frequency at the varying of the line attenuation;

the figure 9 shows a schematic circuit of a bias generator 8 dependent on the process.

A block scheme of an equaliser in accordance to the present invention, shown in figure 1, comprises an input signal 10, coming from a line, applied
20 to an adaptive filter 1 which provides an output 11. The signal at the output of the adaptive filter 1 is applied to a comparator 3 that compares this signal 11 with a reference voltage 13. At the output of the comparator 3 there is a filter 14 composed of a first circuit 4 that provides an indication of the variation of the line attenuation, connected to a charge pump 5 which in turn
25 is connected to a capacitor 6. The circuit 4 is sampled by a working frequency 15. The voltage at the terminals of the capacitor 6 is applied to a variable bias generator 7. To the generator 7 are applied, preferably, also the signals Pr1-Prm coming from a bias generator 8 dependent on the process. The signals Pc1-Pcn in output from the generator 7 are applied to the
30 adaptive filter 1.

- 4 -

The filter 1 comprises preferably adaptive filters of the transconductance type with biquadratic cells, for instance in figure 2a is drawn the block scheme of a transconductance filter having one pole which has an input 20 and it comprises a first stage 21 having transconductance G_m , and a second stage 22 having transconductance G_{mD} , an output 23. Between the first stage 21 and the second stage is connected a capacitor C . To the first stage 21 is connected a terminal P_{c1} and to the second stage 22 is connected a terminal P_{c2} , which receives the bias current. The bias current P_{c2} makes vary the G_{mD} transconductance of the circuit which makes vary the position of the pole in frequency in the working band accordingly. In fact it could be seen from the figure 2b, where it is represented the Bode diagram of the circuit of figure 2a, that the position of the pole in frequency is given by the division G_{mD}/C and the point in which the gain module is equal to 1 it is equal to G_m/C . Therefore making the bias current P_{c2} to vary, varies the value of G_{mD} and therefore the pole frequency position. The bias current P_{c1} makes vary the G_m transconductance of the circuit which, if it is made to vary in a separate way as regards the current P_{c2} , it makes vary the continuous gain accordingly, which as it could be seen in the figure 2b it is equal to G_m/G_{mD} . If the bias current P_{c1} and P_{c2} have been made to vary of the same quantity the pole position moves but the continuous gain does not vary.

To each filter of this type could be associated either one pole or one zero in accordance to the particular type of circuit. To be able to make vary the position of each pole and of each zero it is necessary a bias current for each of them and a current to make vary (increase) the continuous gain of a prefixed value. In an example of realisation of the present invention, the filter 1 comprises two biquadratic filters and one at a single stage, for a total of 5 poles and of 5 zeros. Such types of filters are well known by the skilled in the art, and they are not furtherly described, an example of such filters could be found in the article of F. Rezzi, I. Biatti, M. Cazzaniga and R.

Castello by the title "A 70 mW seventh order filter with 7-50 MHz cut-off frequency and programmable boost and group delay equalization" published in the IEEE Journal of solid state circuits, vol. 32, No. 12, December 1997.

5 The signals Pc1-Pcn correspond to the bias current (variable at the varying of the line attenuation) of the transconductance filters; preferably these bias currents are compensated by the Pr1-Prm signals that correspond to the currents supplied by the bias generator 8 which depend on the thermal and constructive variations of the device.

10 A schematic circuit of an example of a circuit 4 that supplies an indication of the variation of the line attenuation, shown in figure 3, comprises a first bistable circuit 31 of D type and a second bistable circuit 32 of D type. The output of the comparator 3 is applied to a terminal 35 of the first bistable circuit 31 which corresponds to the reset input R of the circuit and also to an input of a NOR circuit 33, the output Q of which is
15 connected to the input D of the bistable 31. The output Q of the bistable 31 is applied the input D of the second bistable circuit 32, the output Q of which is applied to the output terminal 36. The output Q of the bistable 31 is also applied to the second input of the NOR circuit 33. A clock signal is applied to the terminal 15 that it is connected to the clock input of the
20 bistable 32 and it is also connected to the clock input of the bistable 31 through an inverter circuit 34.

A schematic circuit of an example of the charge pump circuit 5, shown in figure 4, comprises a first transistor 41 with p channel and a second transistor 42 with n channel having the gates connected together in order to
25 form an input terminal 36 (connected to the output of the circuit 4), the source of the transistor 41 is connected to the supply voltage, the transistor source 42 is connected to ground, the drain of the transistor 42 is connected to the drain of the transistor 41 and they are connected to a terminal 44 of the capacitor 6, the other terminal of the capacitor 6 is set to ground. If the
30 input signal 36 of the charge pump circuit 5 is at high level, the capacitor 6

discharge itself, if the signal is at a low level the capacitor 6 charge itself.

The whole of the circuits 4, 5 and 6 constitute the filter 14 that integrates the signal in output from the comparator 3 and it provides in output a signal proportional to the course of the line attenuation that is used to predispose the bias and control current $Pc1$ - Pcn of the filter 1.

Particularly the circuit 4, drawn in figure 3 provides in output a signal for instance of high level if the signal in output from the comparator 3 is remained high for at least one clock cycle of the working frequency 15. Varying the working frequency 15 it is possible to vary the reaction times of the circuit at the varying of the line attenuation. The charge pump 5, charges and discharges the capacitor 6 so that to its terminals it is present a voltage proportional to the value of line attenuation opportunely filtered. A schematic circuit of an example of a variable bias generator 7, shown in figure 5, comprises a terminal 44 to which it has been applied the voltage present on the capacitor 6, connected to the gate of a transistor 45 with n channel, the source is connected to ground and the drain is connected to a branch of a first current mirror 46 which is connected to the supply voltage V_{cc} through a transistor 47 with p channel. The other branch of the current mirror 46 is connected to a branch of a second current mirror 48, in the other branch of the mirror 48 flows a current I_{c1} and corresponds to the terminal $Pc1$. The drain of the transistor 45 is connected also to the source of the transistor 49 with p channel. The drain of the transistor 49 is connected to a branch of a third current mirror 50 which is connected directly to the supply voltage V_{cc} . The other branch of the current mirror 50 is connected to a branch of a fourth current mirror 51, in the other branch of the mirror 51 flows a current I_{c2} and corresponds to the terminal $Pc2$. The gate of the transistor 49 is connected to the drain of a transistor 53 having the source connected to ground and the gate applied the terminal $Pr1$. The gate of the transistor 49 is also connected to the transistor 52 with p channel connected like a diode and applied to the supply voltage V_{cc} that forms a current

mirror together with the transistor 47 the two gates of which are connected together.

5 In figure 5, only for representation simplicity have been drawn only the circuits that provide current to the 2 terminal Pc1 and Pc2 of the filter 1 depending on the value of the input Vc of the capacitor 6 and of the input Pr1 coming from the bias generator 8. Also in this case it has been considered for representation simplicity only one terminal of the plurality of the terminals Pr1-Prn.

10 The variable bias generator 7 must provide the bias currents by the terminals Pc1-Pcn to the various transconductance filters present in the filter 1. Such bias currents must be placed at quiescent ($V_c = 0$), for instance placed for a line having length equal to 0 and they therefore must vary at the varying of the line attenuation. The generator 7 receives in input the Vc signal from the capacitor 6 and it is able to absorb the current Ic1 (from the terminal Pc1), which starting from Vc equal to null, linearly increases at the increasing of Vc, up to reach a limit of current equal to $I_p/2$, where I_p is the flowing current in the transistor 53, after that it begins to increase linearly the current Ic2, (up to to a possible circuital limit). The current I_p could be generated by a fixed generator I_p but, the equaliser circuit comprises besides preferably the bias generator 8 which provides a bias current able to compensate the thermal and constructive variations of the equaliser. For instance at the increasing of the temperature the current I_p increases according to the variation of the bias present on the terminal Pr1.

25 In figure 6 could be seen the waveforms of some signals of the circuit of figure 5. Particularly it is possible to see the exponential relationship between the input voltage Vc applied to the terminal 44 of the transistor 45 and its relative drain current Ic. Moreover it is possible to see the course of the current Ic1 and Ic2 flowing respectively in the mirrors 48 and 51 and correspondent to the bias and control current present on the terminals Pc1 and Pc2.

30

- 8 -

As already said it has been represented for simplicity a reduced circuit able to provide only two currents to the terminals Pc1 and Pc2. It is however to imagine a series of currents one for each pole and one for each zero present in the filter 1 and besides the current or preferably the currents necessary to increase the continuous gain. The currents relative to each couple of poles/ zeros, positioned in frequency in the same place, will have a similar course as, better explained further on, they will have to move simultaneously, after that the couple of poles/zeros placed immediately at a smaller frequency will move.

The figure 7 shows a diagram that shows the positioning of the poles/zeros in the frequencies plane, particularly it is possible to note the uniform spacing between the couples of poles/zeros along a logarithmic frequency axle inside the band B of the working frequencies of the filter. Besides it is possible to note the displacement direction that the poles and the zeros effect at the varying (at the increasing) of the line attenuation, in response of the variations of the bias current to the terminals Pc1-Pcn. Particularly the poles move toward the high frequency and the zeros move toward the low frequency. Besides the couples of poles/zeros move in succession (in the indicated direction) beginning from the identifying number 71 up to the number 75, finally it is increased the filter continuous gain making the opportune bias currents vary. In practice first moves the pole and the zero of the couple 71 placed at high frequency inside the working band, therefore in succession moves the pole and the zero of the couple 72 placed to a lower frequency as regards the couple 71 that has been moved previously up to the movement of the couple 75 placed at a lower frequency. Therefore, when all the couples have moved it is increased the continuous gain. All the displacement above reported are effected in consequence of the variations of the bias and control current present on the terminals Pc1-Pcn.

In figure 8 is shown a diagram of the transfer function of the filter 1 in

function of the frequency at the varying of the line attenuation, the arrow points out as varies the transfer function at the increasing of the line attenuation. At the moving of the couples of poles/zeros above mentioned it is possible to see in figure 8 the variation of the transfer function and particularly it is possible to see that only at the end the continuous gain is varied.

A schematic circuit of an example of a bias generator 8 dependent from the process, shown in figure 9, comprises a plurality of transistors 61 and 62 with n channel having the source connected to ground, the drains respectively connected to the terminals Pr1-Prm, and the gate connected together and connected to a node at which terminals are connected a gate of a transistor 63, a terminal of a generator of current Iref 67 and a branch of a first current mirror 68. The source of the transistor 63 is connected to ground and the drain is connected to the source of a differential couple formed by the transistors 64 and 65 with channel n which gates are respectively connected to two reference voltages Vref1 and Vref2, with $V_{ref2} > V_{ref1}$, and the drains are connected to a second current mirror 66 connected to the power supply Vcc. The drain of the transistor 64 is also connected to a branch of the mirror 68. This circuit generates currents able to compensate the variations in temperature, of the supply voltage and of the dispersions of the characteristics (from device to device) due to the construction process.

In accordance to the present invention it is possible to realise a device in CMOS technology at low cost with the possibility of being integrated with other circuits on the same chip where external circuits are not required. Besides a good equalization with a reduced number of poles and zeros is obtained, in fact with 5 poles and 5 zeros and an equalisation band of 260 MHz it is possible to equalize signals transmitted on a line of length of about 350 m.

THIS PAGE BLANK (USPTO)

- 1 -

CLAIMS

1. Method to equalise signals transmitted on a line comprising the following phases: applying an analogical adaptive filter in series to said line, having a working frequency band and having at least one pole and at least one zero the position of which in said working frequency band is variable in response to the attenuation of said line; applying a retroaction circuit to the output of said filter able to vary the position of said at least one pole and at least one zero; characterised by setting said at least one pole and at least one zero in correspondence to a prefixed frequency of said working frequency band; moving the position of said at least one pole toward the high frequencies at the increasing of said attenuation of said line; moving the position of said at least one zero toward the low frequencies at the increasing of said attenuation of said line.

2. Method in accordance to the claim 1 characterized by positioning a first couple of poles/zeros of said analogical adaptive filter to a first prefixed frequency in said working frequency band;

positioning a second couple of poles/zeros of said analogical adaptive filter to a second prefixed frequency in said working frequency band;

said first prefixed frequency is greater than said second prefixed frequency;

spacing said first and second prefixed frequency in a logarithmic way in said working frequency band;

moving the poles of said first and second couple of poles/zeros toward the high frequencies at the increasing of said attenuation of said line;

moving the zero of said first and second couple of poles/zeros toward the low frequencies to the increasing of said attenuation of said line.

3. Method in accordance to the claim 2 characterized by moving the position of the first couple of pole/zero and therefore in succession the position of the second couple of pole/zero at the increasing of said attenuation of said line.

- 2 -

4. Method in accordance to the claim 1 characterized in that said at least one pole and at least a zero are placed in the frequencies plane in correspondence of said prefixed frequency in order to equalize the attenuation of said line when said line has null attenuation.

5 5. Method in accordance to the claim 1 characterized in that said at least one pole and said at least a zero are moved of the 30% compared to the initial position.

6. Method in accordance to the claim 1 characterized in that at the increasing of said attenuation of said line after the moving phases of the
10 position of said at least one pole and of said at least a zero comprises the phase of increasing the continuous gain of said adaptive filter.

7. Method in accordance to the claim 1 characterized in that said retroaction circuit includes a compensation circuit of the thermal and constructive variations of said equalizer.

15 8. Equaliser circuit of signals transmitted on a line having an attenuation comprising: an analogical adaptive filter (1) applied in series to said line comprising at least two transconductance filters having a bias current (P_{c1} - P_{cn}) each and to which it is associated at least one pole and at least one zero the position in frequency of which in the working band (B) is variable in
20 response to said bias current (P_{c1} - P_{cn}); a retroaction circuit (3, 4, 5, 6, 7) applied to the output of said filter (1) able to vary said bias current (P_{c1} - P_{cn}); said bias current (P_{c1} - P_{cn}) varies at the varying of said attenuation of said line; characterised in that said at least two transconductance filters have
25 said bias current of prefixed value; said bias current is made to vary at the increasing of said attenuation so that said at least one pole is moved toward the high frequencies; said bias current is made to vary at the increasing of said attenuation so that said at least a zero is moved toward the low frequencies.

30 9. Equalizer filter in accordance to the claim 8 characterized in that said adaptative analogical filter (1) includes four transconductance filters having

- 3 -

at least a bias current each and to which are associated two couples of poles and of zeros the position of which in frequency in the working band (B) is variable in response to said bias current;

5 said two couples of poles/zeros are placed having a logarithmic spacing in said working frequency band (B);

 said bias current is made to vary so that said poles are moved toward the high frequencies at the increasing of said attenuation of said line;

 said bias current is made to vary so that said zeros are moved toward the low frequencies at the increasing of said attenuation of said line.

10 10. Equalizer filter in accordance to the claim 8 characterized by comprising a bias generating circuit (8) able to modify said bias current in response to the temperature variations.

 11. Equalizer filter in accordance to the claim 8 characterized in that it has been realized in CMOS technology.

15 12. Integrated circuit of CMOS type comprising an equalizer circuit of signals transmitted on a line in accordance to the claim 8.

THIS PAGE BLANK (USPTO)

- 1 -

"Equaliser".

* * * * *

ABSTRACT

5 The present invention refers to a method and to an equalizer circuit of
signals transmitted on a line. In an embodiment the equaliser circuit of
signals transmitted on a line having an attenuation comprising: an analogical
adaptive filter (1) applied in series to said line comprises at least two
transconductance filters having a bias current ($Pc1-Pcn$) each and to which it
is associated at least one pole and at least one zero the position in frequency
10 of which in the working band (B) is variable in response to said bias current
($Pc1-Pcn$); a retroaction circuit (3, 4, 5, 6, 7) applied to the output of said
filter (1) able to vary said bias current ($Pc1-Pcn$); said bias current ($Pc1-Pcn$)
varies at the varying of said attenuation of said line; characterised in that
said at least two transconductance filters have said bias current of prefixed
15 value; said bias current is made to vary at the increasing of said attenuation
so that said at least one pole is moved toward the high frequencies; said bias
current is made to vary at the increasing of said attenuation so that said at
least a zero is moved toward the low frequencies. (Figure 1).

THIS PAGE BLANK (USPTO)

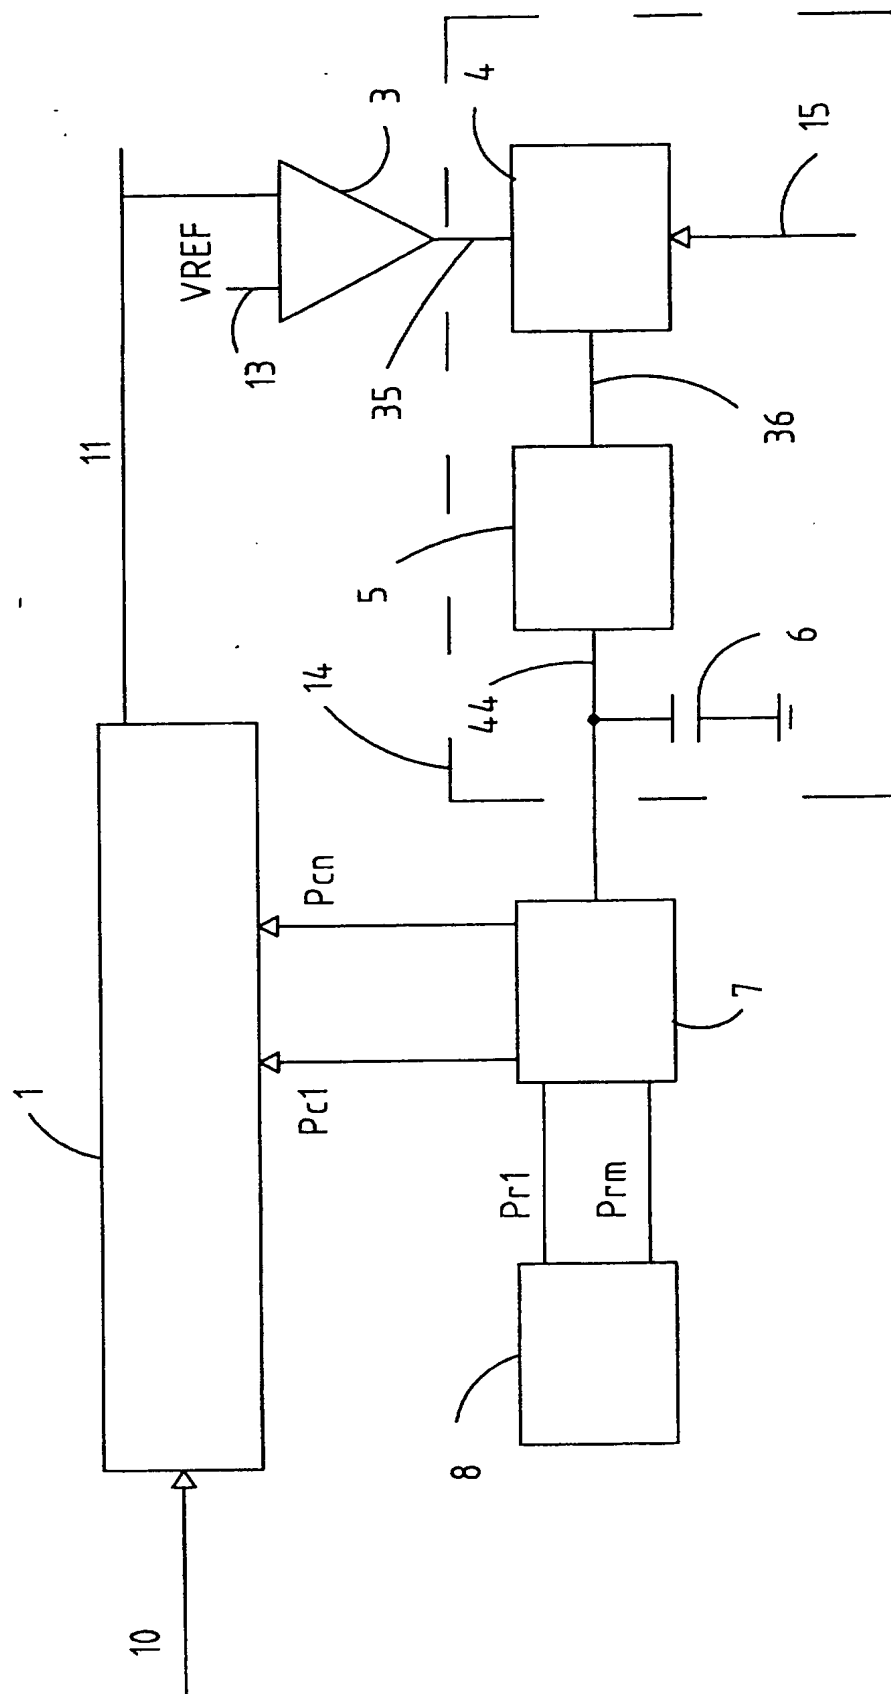


Fig. 1

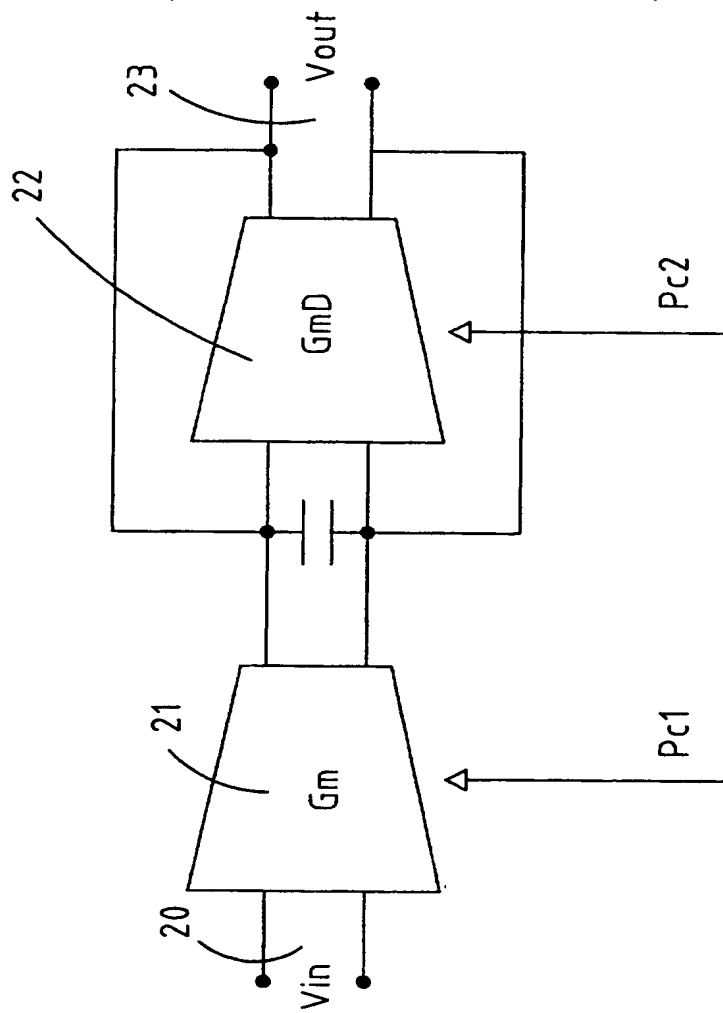


Fig. 2a



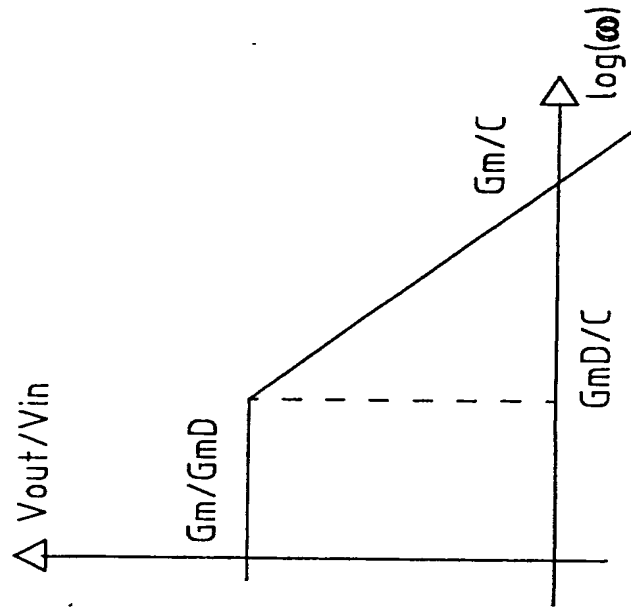


Fig. 2b

3/6

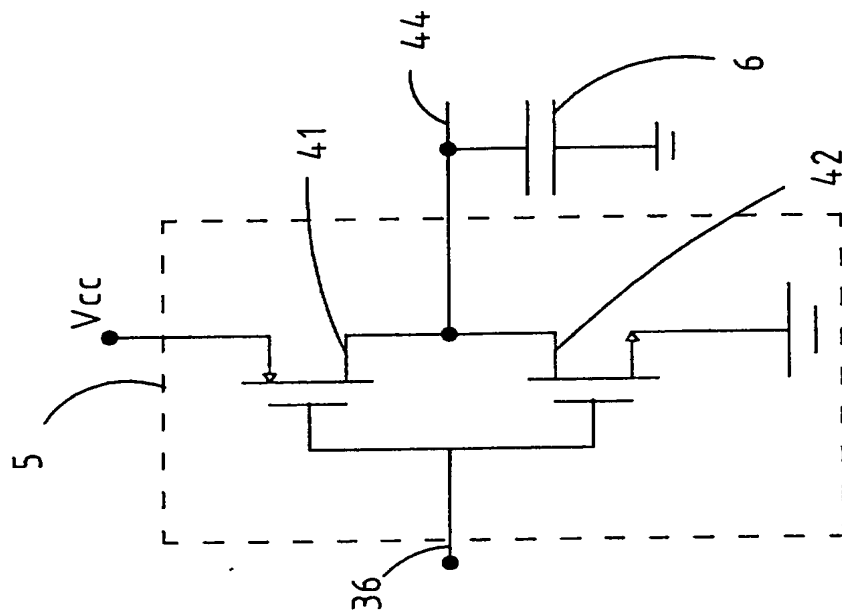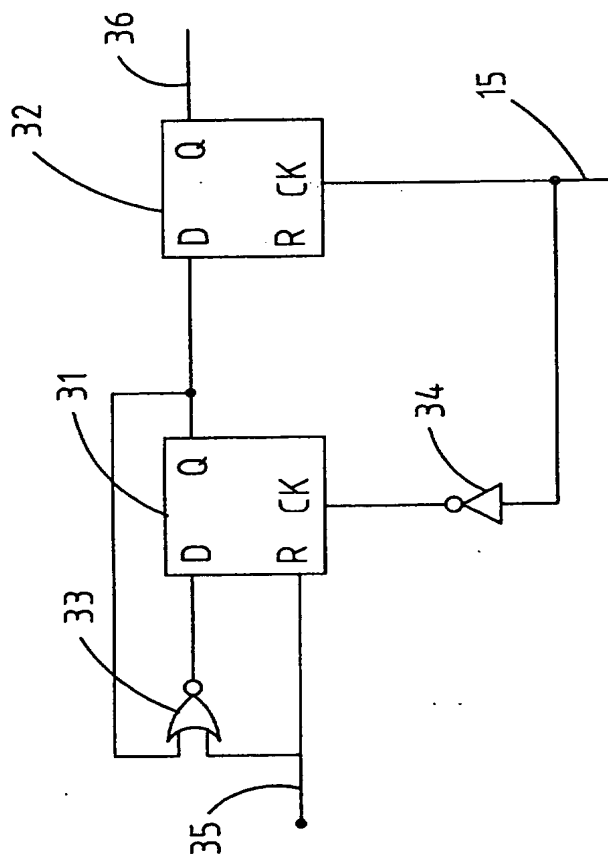

4/6

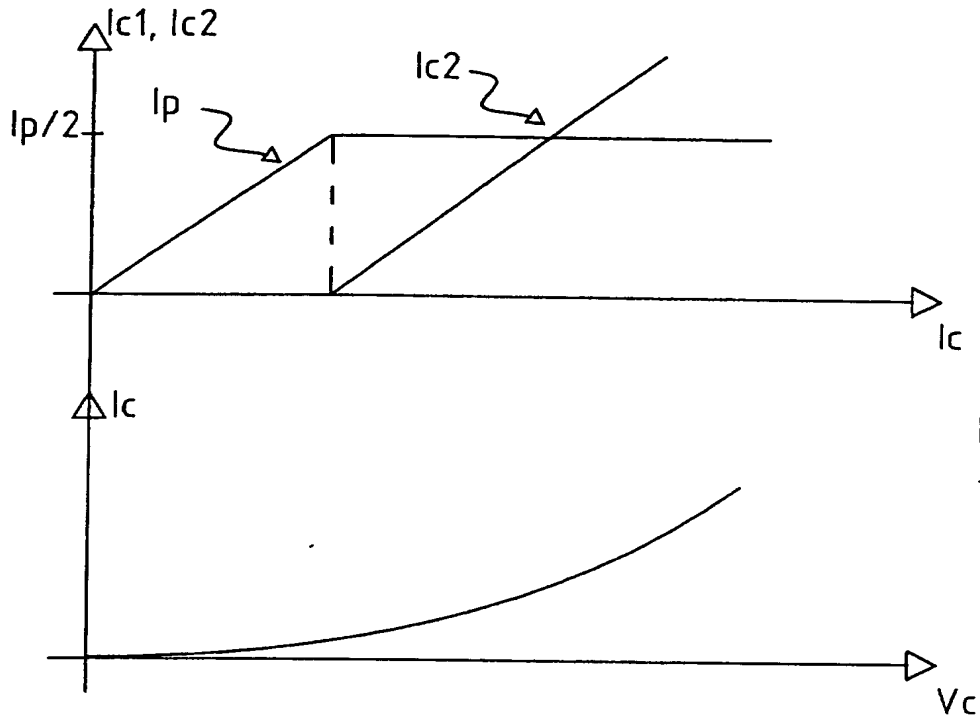


Fig. 6

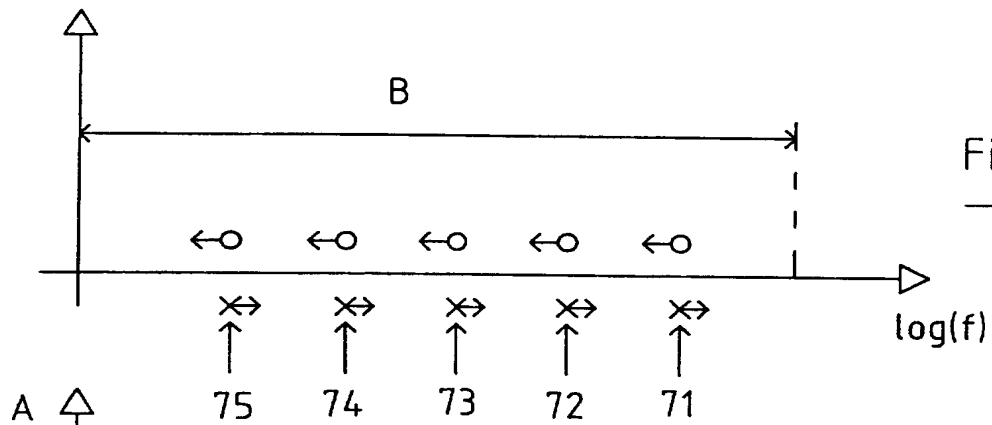


Fig. 7

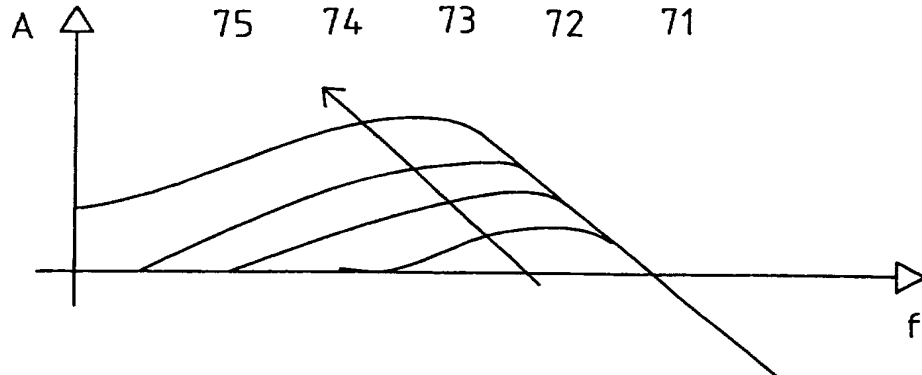


Fig. 8




Fig. 9

